



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on Facebook



Follow us on YouTube



Follow us on WeChat



Download "Hangcha Forklift" App



ISO45001:2018



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform to the European Safety Requirements.

2024 VERSION 2/COPYRIGHT 2024/09

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



A Series Stand-on Reach Truck

with capacities of 1,500 to 1,800kg

The World of Hangcha
SINCE 1956




LET THE LITHIUM POWER UNLEASH



INNOVATIVE SOLUTIONS NEW POWER NOW

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature, ensuring normal operation in low temperatures.
- / Quick charging.
- / Long-working: 4000 charging cycles, capacity retention greater than 80%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

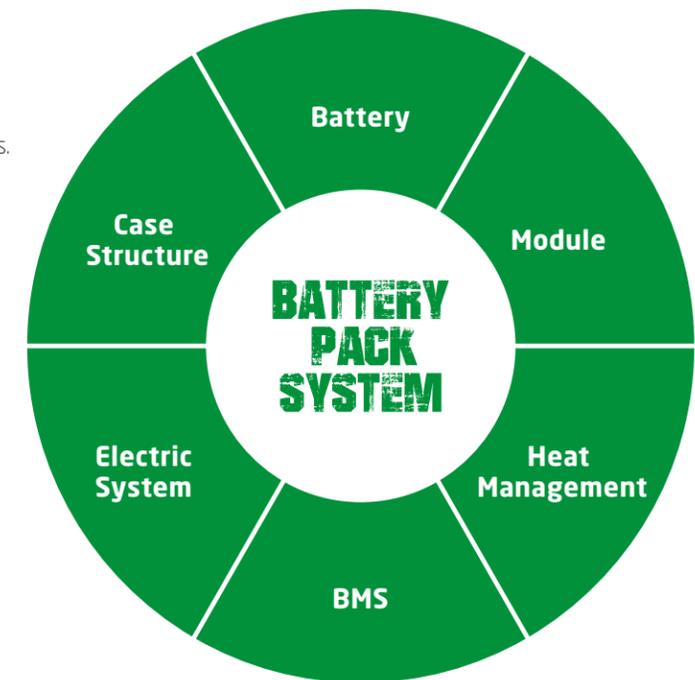

Rapid charging and opportunity charging ensure continuous availability of vehicles.

Li-Ion powered forklifts are always available. They allow for fast full charging or boost charging. They are maintenance free and do not require a battery change when used for multi-shift operations.



HANGCHA provides Li-Ion battery (LiFePO4) with 6 years or 12000 hours warranty.

**6 YEARS
WARRANTY**

Li-Ion Battery Specification

| Type | | CQD15-AC5S-I* | CQD18-AC5S-I* |
|---------------------------|------|---------------|---------------|
| Battery voltage, capacity | V/Ah | | 48/228* |
| Option capacity | V/Ah | | 48/302 |
| Titans charger | | | SLC-48100 |

Note: • Available for cold storage
• CE model

A Series Stand-on Reach Truck

The A series stand-on reach truck is a new-generation product developed by our company in response to different market needs. The truck has comfortable ergonomics, wide operating vision and a stable control system.

**Compact body/
Big productivity/
High performance**



Comfort

- / Optimal ergonomic design. the steering wheel, operating lever and accelerator are positioned at the best distance to the driver, making the operation lighter more comfortable.
- / The newly designed large-area back support is soft and comfortable, reducing operator fatigue.
- / Use Shimadzu multi-way valves with low start force. And the comfort is increased.
- / Adopting a brand-new layout, the operating space is larger, and the boarding step is lower, making it easier for the driver to get in and out frequently.
- / Standard equipment side charging port for the battery, making charging more convenient.

Safety

- / An optimal four-link suspension mechanism forces the drive wheel and the auxiliary wheels, thereby reducing slipping of the drive wheel.
- / A disc mechanical brake and regenerative braking system make the truck safer and more reliable.
- / Turn speed is controlled to the turning radius, providing stable turning matched to the state of operation.
- / If the operator is not in the normal operating position, travel power is interrupted and load-handling (except lowering) operations are stopped.
- / The right leg of the OHG moves backwards to protect the driver's back in case of a collision.
- / The brake interlock switch, when the brake is released, triggers the interlock switch, which prohibits movement and can only be operated hydraulically.

Reliability

- / The Curtis controller and CAN-bus communication provide safe and reliable.
- / The Shimadzu multi-way valve and gear pump provide higher efficiency and faster lifting speed.
- / EPS system with brushless technology making steering and operation easier and clearer.
- / Standard equipment includes a battery position switch to ensure that the battery is properly installed, enhancing the safety of the entire truck.
- / Equipped with a proven mechanical disc brake system, it allows for emergency stopping as well as parking brake application, offering high reliability.

Stability

- / Suspension control system effectively reduces the shake when turning, lifting and moving forward and backward.
- / The pump motor assembling on the rear side of the body makes the center of gravity moving backwards and improving stability.
- / Automatic speed control: Travel speed is controlled according to the lift height, providing stability and safety.



Safe pedal: when the pedal is released, traveling is stopped, and only hydraulic operation is enabled



Charging plug inside operator's compartment, this eliminates the need to disconnect the plug from battery, enhancing ease of operation (Std)



New designed mast and the large open steel roof provide super visibility and safety



Operator's compartment



Forks can tilt forward/backward for easy loading

Maintenance

- / Traction and lifting system are all adopt maintenance-free AC motor.
- / The door can be fully opened for easy maintenance.
- / The standard equipment includes a DC brushless motor for electric power steering, no need for maintenance costs.
- / The controller and multi-way valve are located on the front side of the body, and it's only necessary to open the front sealing plate during maintenance.



Energy saving and efficient

- / The reach truck, while meeting the strength requirements, is reasonably laid out to reduce energy consumption by reducing the truck's weight.
- / The hydraulic system has been optimized to improve the lifting performance. The lifting speed was increased by 23% without load, and the lifting speed was increased by 22% with full load.
- / The traction system adopts large speed ratio gearbox, which makes the motor speed higher and the torque less.
- / The excellent climbing performance increases the climbing performance by 48% without load and climbing performance by 15% with full load.

Standard specification

- / Headlights (LED) + turn signals (LED)
- / Shimadzu triple valves
- / AC driving + AC lifting
- / EPS (Electric Power Steering) system
- / Soft landing (duplex mast)
- / Suspension control system
- / Speed control at corner
- / Mechanical brakes
- / Regenerative braking (reverse, neutral, brake)
- / USB charge port
- / Warning light
- / Side charging
- / Emergency power-off switch
- / Interlock switch
- / Battery position switch
- / Lift damping system

Options

- / Straight projection lamp
- / Quadruple and quintuplet
- / Anti-rollback system
- / Fork camera
- / Altimeter
- / Password lock
- / Reflector
- / Fire extinguisher
- / Height level selection
- / Lowering lock valve
- / Cold storage
- / Integral sidsifter
- / Cigarette lighter

| | CQD15/18-AC5S | | | | |
|-------|---------------|------|-------|--------|------|
| | Tianneng | Zibo | Xunqi | Hawker | FAAM |
| 280Ah | ● | ○ | ○ | | |
| 325Ah | ● / ○ | ○ | ○ | ○ | ○ |
| 375Ah | ○ | ○ | | ○ | ○ |
| 450Ah | ○ | | | | |

● Std. ○ Opt.



COMFORTABLE DESIGN

It's convenient for getting on/off.



Floor height: 280mm.


Optimal lifting system

- / New optimal manufacturing process ensures the roller gap of the mast, making the mast sways smaller and the vehicle safer.
- / Add 2 safety functions: the mast moves backward to enable hydraulic buffer protection and reduce the speed in this position. It helps reduce the mast swaying when in a high position and makes the vehicle safer.
- / The optimized mast piping with an upper and lower layout mast improves vision of the mast (Triplex mast).
- / The forklift's sleeve structure boasts a simple structure, small mast thickness and light weight.



BATTERY REACH OUT SYSTEM



The battery can be reached out easily. It enables smooth battery maintenance, inspection and replacement.

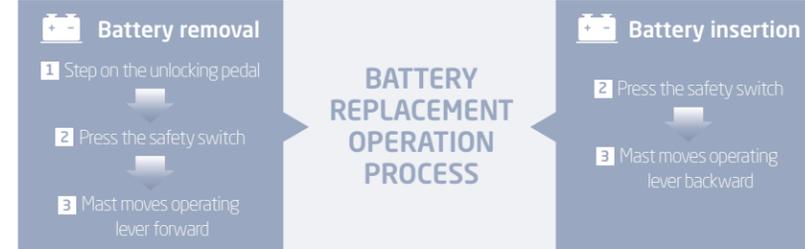

A Series 1.5~1.8t Stand-on Reach Truck Specification

| Distinguishing mark | 1.1 | Manufacturer | HANGCHA GROUP CO.,LTD. | | |
|---------------------|----------------|--|--|------------------------------------|------------------------------------|
| | 1.2 | Manufacturer's type designation | CQD15-AC55* | CQD18-AC55* | |
| | 1.3 | Drive: electric (battery or mains), diesel, petrol, fuel gas | Electric | Electric | |
| | 1.4 | Operator Position | Stand On | Stand On | |
| | 1.5 | Rated capacity/rated load | Q (kg) | 1500 | 1800 |
| | 1.6 | Load centre distance | c (mm) | 500 | 500 |
| | 1.7 | Load distance, centre of drive axle to fork | x (mm) | 375 | 525 |
| | 1.8 | Load distance, centre of drive axle to fork,mast reached forward | x ₁ (mm) | 175 | 175 |
| | 1.9 | Wheelbase | y (mm) | 1350 | 1500 |
| Weight | 2.1 | Service weight (including battery) | Kg | 2430 | 2460 |
| | Tyres, chassis | 3.1 | Tyres: solid rubber, superelastic, pneumatic, polyurethane | superelastic(driving)/polyurethane | superelastic(driving)/polyurethane |
| 3.2 | | Tyre size, rear | mm | Ø343×135 | Ø343×135 |
| 3.3 | | Tyre size, front ×2 | mm | Ø250×105 | Ø250×105 |
| 3.4 | | Tyre size,Caster ×2 | mm | Ø150×85 | Ø150×85 |
| 3.5 | | Wheels,number front/rear(×=driven wheels) | | 2/1×+2 | 2/1×+2 |
| 3.6 | | Tread width,front | b ₁₁ (mm) | 986 | 986 |
| 3.7 | | Tread width,rear | b ₁₂ (mm) | 645 | 645 |
| Dimensions | 4.1 | Tilt of mast/fork carriage forward/backward | α/β(°) | 3/5 | 3/5 |
| | 4.2 | Height, mast lowered | h ₁ (mm) | 1995 | 1995 |
| | 4.3 | Lift | h ₃ (mm) | 3000 | 3000 |
| | 4.4 | Mast Extended height | h ₄ (mm) | 3876 | 3876 |
| | 4.5 | Free lift | h ₂ (mm) | 105 | 105 |
| | 4.6 | Height of overhead guard | h ₆ (mm) | 2240 | 2240 |
| | 4.7 | Ground clearance,below mast | m ₂ (mm) | 80 | 80 |
| | 4.8 | Height of support arms | h ₈ (mm) | 275 | 275 |
| | 4.9 | Overall length | l ₁ (mm) | 2146 | 2146 |
| | 4.10 | Length to face of forks | l ₂ (mm) | 1226 | 1226 |
| | 4.11 | Overall width | b ₁ /b ₂ (mm) | 1094/1090 | 1094/1090 |
| | 4.12 | Fork dimensions ISO | s/e/l (mm) | 35×100×920 | 35×100×920 |
| | 4.13 | Distance between fork-arms | b ₄ /b ₅ (mm) | 230-720 | 230-720 |
| | 4.14 | Reach distance | l ₄ (mm) | 550 | 700 |
| | 4.15 | Aisle width for pallets 1100 x 1100 , clearance 200 | A _{st} (mm) | 2710 | 2745 |
| | 4.16 | Aisle width for pallets 1000 x 1200 crossways,clearance 200 | A _{st} (mm) | 2666 | 2715 |
| | 4.17 | Turning radius | W _a (mm) | 1600 | 1750 |
| Performance Data | 5.1 | Travel speed,laden/unladen | Km/h | 9.5/10.5 | 9.5/10.5 |
| | 5.2 | Lift speed,laden/unladen | m/s | 0.320/0.550 | 0.300/0.530 |
| | 5.3 | Lowering speed,laden/unladen | m/s | 0.440/0.400 | 0.440/0.400 |
| | 5.4 | Reach speed,laden/unladen | m/s | 0.110/0.110 | 0.110/0.110 |
| | 5.5 | Max. gradeability,laden/unladen | % | 15/20 | 15/20 |
| Electric engine | 6.1 | Drive motor rating S2 60 min | kW | AC 4 | AC 4 |
| | 6.2 | Lift motor rating at S3 15% | kW | AC 9 | AC 9 |
| | 6.3 | Steering motor | kW | DC 0.45 | DC 0.45 |
| | 6.4 | Battery voltage, nominal capacity K5 | V/Ah | 48/280 | 48/280 |
| Addition data | 7.1 | Type of drive control | | CURTIS Full AC | CURTIS Full AC |
| | 7.3 | Sound level at the driver's ear according to EN / DIN 12 053 | dB (A) | <75 | <75 |

Note: * CE model

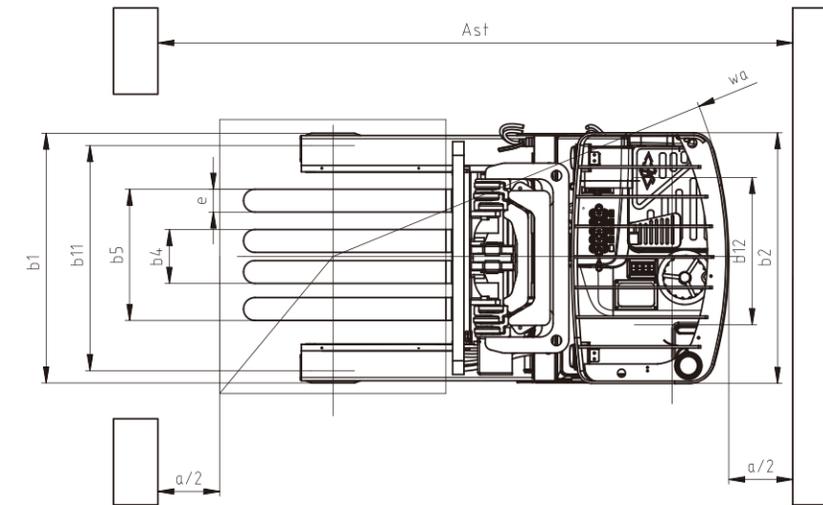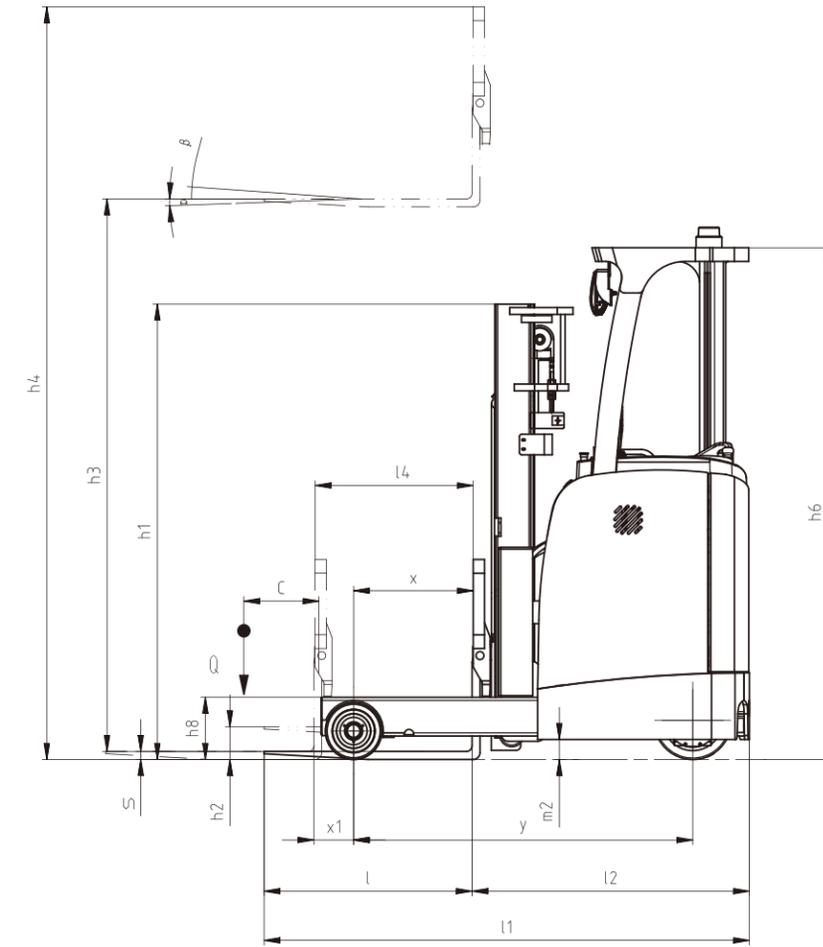

1.5~1.8t Mast Specification

| Type | Model | Lifting height h ₃ | Mast lowered h ₁ | Mast extended h ₄ | | Free lifting height h ₂ | | Tilting range | | Load capacity at 500mm | | |
|------------------------|--------|-------------------------------|-----------------------------|------------------------------|------------------|------------------------------------|----------|---------------|------|------------------------|------|--|
| | | | | With backrest | Without backrest | Forward | Backward | 1.5t | 1.8t | | | |
| | | mm | mm | mm | mm | (°) | (°) | kg | kg | kg | kg | |
| Wide view duplex mast | QAZ18M | 2500 | 1745 | 3376 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 2700 | 1845 | 3576 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 3000 | 1995 | 3876 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 3500 | 2245 | 4376 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 4000 | 2595 | 4876 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 4500 | 2845 | 5376 | 105 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 5000 | 3095 | 5876 | 105 | 3 | 5 | 1250 | 1550 | 1250 | 1550 | |
| Full free triplex mast | QAZ18N | 4500 | 2055 | 5376 | 1170 | 3 | 5 | 1500 | 1800 | 1500 | 1800 | |
| | | 5000 | 2215 | 5876 | 1519 | 3 | 5 | 1250 | 1550 | 1250 | 1550 | |
| | | 5500 | 2395 | 6376 | 1689 | 3 | 5 | 900 | 1200 | 900 | 1200 | |
| | | 6000 | 2565 | 6876 | 1924 | 3 | 5 | 850 | 1150 | 850 | 1150 | |
| | | 6500 | 2800 | 7376 | 2144 | 3 | 5 | 700 | 1050 | 700 | 1050 | |
| | | 7000 | 3020 | 7876 | | | | | | | | |

With sideshifter minus 200kg

